



Low switching losses  
Low reverse recovery charge  
High power cycling capability

## Fast Recovery Diode Type DF243-1000-18

Average forward current		$I_{FAV}$	1000 A		
Repetitive peak reverse voltage		$V_{RRM}$	1000 ÷ 1800 V		
Reverse recovery time		$t_{rr}$	5.0 $\mu$ s		
$V_{RRM}, V$	1000	1200	1400	1600	1800
Voltage code	10	12	14	16	18
$T_j, ^\circ C$	- 60 ÷ 125				

### MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
<b>ON-STATE</b>					
$I_{FAV}$	Average forward current	A	1000 1170	$T_c=68\ ^\circ C$ ; Double side cooled; $T_c=55\ ^\circ C$ ; Double side cooled; 180° half-sine wave; 50 Hz	
$I_{FRMS}$	RMS forward current	A	1570	$T_c=68\ ^\circ C$ ; Double side cooled; 180° half-sine wave; 50 Hz	
$I_{FSM}$	Surge forward current	kA	15.0 17.0	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; 50 Hz ( $t_p=10\ ms$ ); single pulse; $V_R=0\ V$ ;
			16.0 18.0	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; 60 Hz ( $t_p=8.3\ ms$ ); single pulse; $V_R=0\ V$ ;
$I^2t$	Safety factor	$A^2s \cdot 10^3$	1125 1445	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; 50 Hz ( $t_p=10\ ms$ ); single pulse; $V_R=0\ V$ ;
			1060 1340	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; 60 Hz ( $t_p=8.3\ ms$ ); single pulse; $V_R=0\ V$ ;
<b>BLOCKING</b>					
$V_{RRM}$	Repetitive peak reverse voltages	V	1000÷1800	$T_{j\ min} < T_j < T_{j\ max}$ ; 180° half-sine wave; 50 Hz;	
$V_{RSM}$	Non-repetitive peak reverse voltages	V	1100÷1900	$T_{j\ min} < T_j < T_{j\ max}$ ; 180° half-sine wave; 50 Hz; single pulse;	
$V_R$	Reverse continuous voltages	V	$0.75 \cdot V_{RRM}$	$T_j = T_{j\ max}$ ;	
<b>THERMAL</b>					
$T_{stg}$	Storage temperature	$^\circ C$	- 60 ÷ 125		
$T_j$	Operating junction temperature	$^\circ C$	- 60 ÷ 125		
<b>MECHANICAL</b>					
F	Mounting force	kN	14.0 ÷ 16.0		
a	Acceleration	$m/s^2$	50	Device unclamped	
			100	Device clamped	

#### JSC "PROTON-ELECTROTEX"

19 Leskova, 302027, Orel, RUSSIA, Fax : +7 (4862) 41-00-56 Phones : +7 (4862) 43-41-39 / 43-41-40

E-mail: [eletex@eletex.ru](mailto:eletex@eletex.ru) / [eltex@orel.ru](mailto:eltex@orel.ru); I-net: [www.eletex.ru](http://www.eletex.ru)

## CHARACTERISTICS


Symbols and parameters		Units	Values	Conditions	
<b>ON-STATE</b>					
$V_{FM}$	Peak forward voltage, max	V	1.80	$T_j=25\text{ }^\circ\text{C}; I_{FM}=3140\text{ A}$	
$V_{F(TO)}$	Forward threshold voltage, max	V	1.15	$T_j=T_{j\text{ max}}$	
$r_T$	Forward slope resistance, max	m $\Omega$	0.250	$0.5\pi I_{FAV} < I_T < 1.5\pi I_{FAV}$	
<b>BLOCKING</b>					
$I_{RRM}$	Repetitive peak reverse current, max	mA	70	$T_j=T_{j\text{ max}};$ $V_R=V_{RRM}$	
<b>SWITCHING</b>					
$Q_{rr}$	Total recovered charge, max	$\mu\text{C}$	700	$T_j=T_{j\text{ max}}; I_{FM}=I_{FAV};$	
$t_{rr}$	Reverse recovery time, max	$\mu\text{s}$	5.0	$di_R/dt=-100\text{ A}/\mu\text{s};$	
$I_{rrM}$	Peak reverse recovery current, max	A	280	$V_R=100\text{ V};$	
<b>THERMAL</b>					
$R_{thjc}$	Thermal resistance, junction to case, max	$^\circ\text{C}/\text{W}$	0.0320	Direct current	Double side cooled
$R_{thjc-A}$			0.0704		Anode side cooled
$R_{thjc-K}$			0.0576		Cathode side cooled
$R_{thck}$	Thermal resistance, case to heatsink, max	$^\circ\text{C}/\text{W}$	0.0060	Direct current	
<b>MECHANICAL</b>					
w	Weight, typ	g	260		
$D_s$	Surface creepage distance	mm (inch)	23.69 (0.933)		
$D_a$	Air strike distance	mm (inch)	19.10 (0.752)		

PART NUMBERING GUIDE						GROUP OF RECOVERY TIME	
DF	243	1000	18	E4	N	Group Symbol	
1	2	3	4	5	6	$t_{rr}, \mu\text{s}$	E4 5.0
1. Fast recovery diode 2. Design version 3. Average forward current, A 4. Voltage code 5. Group of reverse recovery time 6. Ambient conditions: N – normal; T – tropical							

### JSC "PROTON-ELECTROTEX"

19 Leskova, 302027, Orel, RUSSIA, Fax : +7 (4862) 41-00-56 Phones : +7 (4862) 43-41-39 / 43-41-40

E-mail: [eletex@eletex.ru](mailto:eletex@eletex.ru) / [eltex@orel.ru](mailto:eltex@orel.ru); I-net: [www.eletex.ru](http://www.eletex.ru)

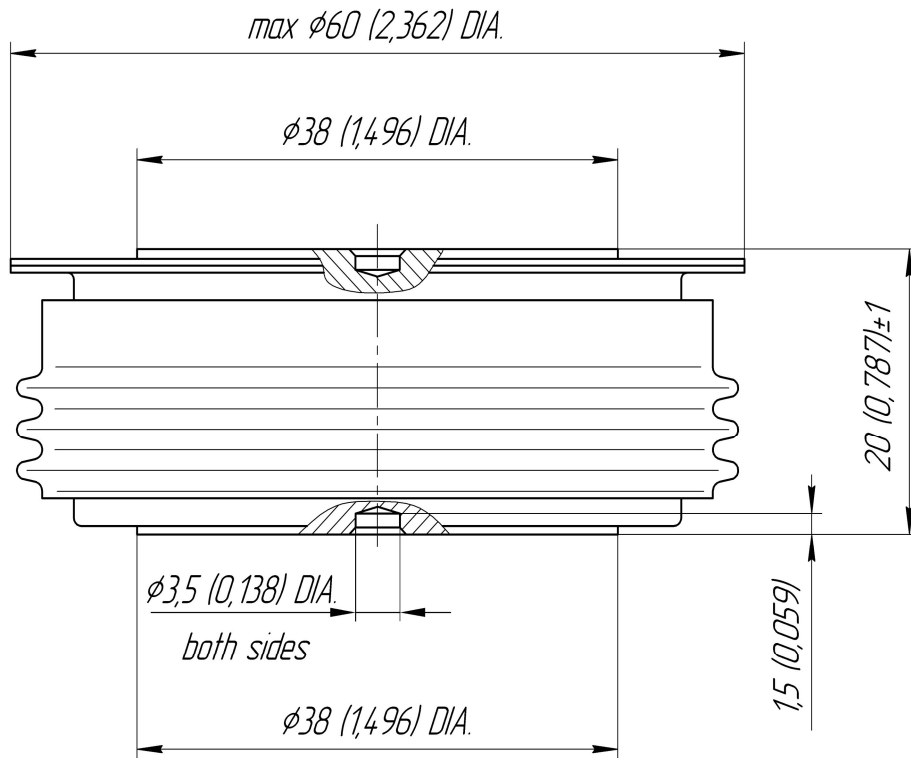

All dimensions in millimeters (inches)

The information contained herein is confidential and protected by Copyright.  
 In the interest of product improvement, Proton-Electrotex reserves the right to change data sheet without notice.

**JSC "PROTON-ELECTROTEX"**

19 Leskova, 302027, Orel, RUSSIA, Fax : +7 (4862) 41-00-56 Phones : +7 (4862) 43-41-39 / 43-41-40

E-mail: [eletex@eletex.ru](mailto:eletex@eletex.ru) / [eltex@orel.ru](mailto:eltex@orel.ru); I-net: [www.eletex.ru](http://www.eletex.ru)