




Package Type D.SA1-xx

| | | |
|----------------------|--------------------|---------------------------|
| Tightening torque | 20 ÷ 30 Nm | |
| Nominal Weight | 250 g | |
| D_s | 12.4(4.882) | Surface creepage distance |
| D_a | 12.4(4.882) | Air strike distance |

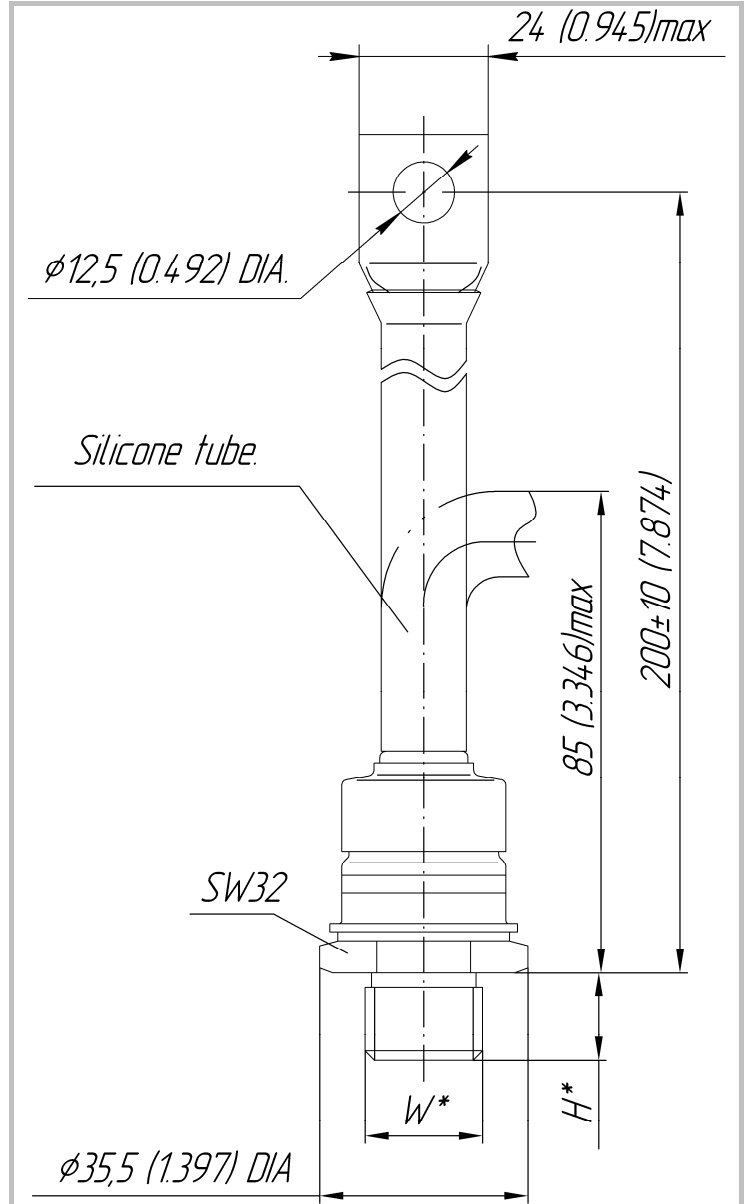

| Package type | Type of screw | W | H |
|--------------|---------------------|------------|-----------|
| D.SA1-MA | Metric Screw-thread | M20x1,5 | 16 (0,63) |
| D.SA1-IA | Inch Screw-thread | 3/4"-16UNF | 27 (1,07) |

Polarity for the USA customs

| Polarity | | Example of code designation | Reference designation | Colors | |
|----------|-----------------|------------------------------|-----------------------|----------|------------|
| | | | | Anode | Cathode |
| Normal | Cathode to stud | D465-SA1-IA X -18 | | Red tube | - |
| Reverse | Anode to stud | D465-SA1-IA-18 | | - | Black tube |

Polarity for Europe customs (on default)

| Polarity | | Example of code designation | Reference designation | Colors | |
|----------|-----------------|------------------------------|-----------------------|------------|----------|
| | | | | Anode | Cathode |
| Normal | Anode to stud | D465-SA1-MA-18 | | - | Red tube |
| Reverse | Cathode to stud | D465-SA1-MA X -18 | | Black tube | - |

*Please inform us about type of color marking (for the USA or Europe)