




## Package Type **D.SB3**

Mounting force	<b>1.5 ÷ 2.5 kN</b>	
Nominal Weight	<b>500 g</b>	
<b>D<sub>s</sub></b>	<b>12.4(4.882)</b>	Surface creepage distance
<b>D<sub>a</sub></b>	<b>12.4(4.882)</b>	Air strike distance

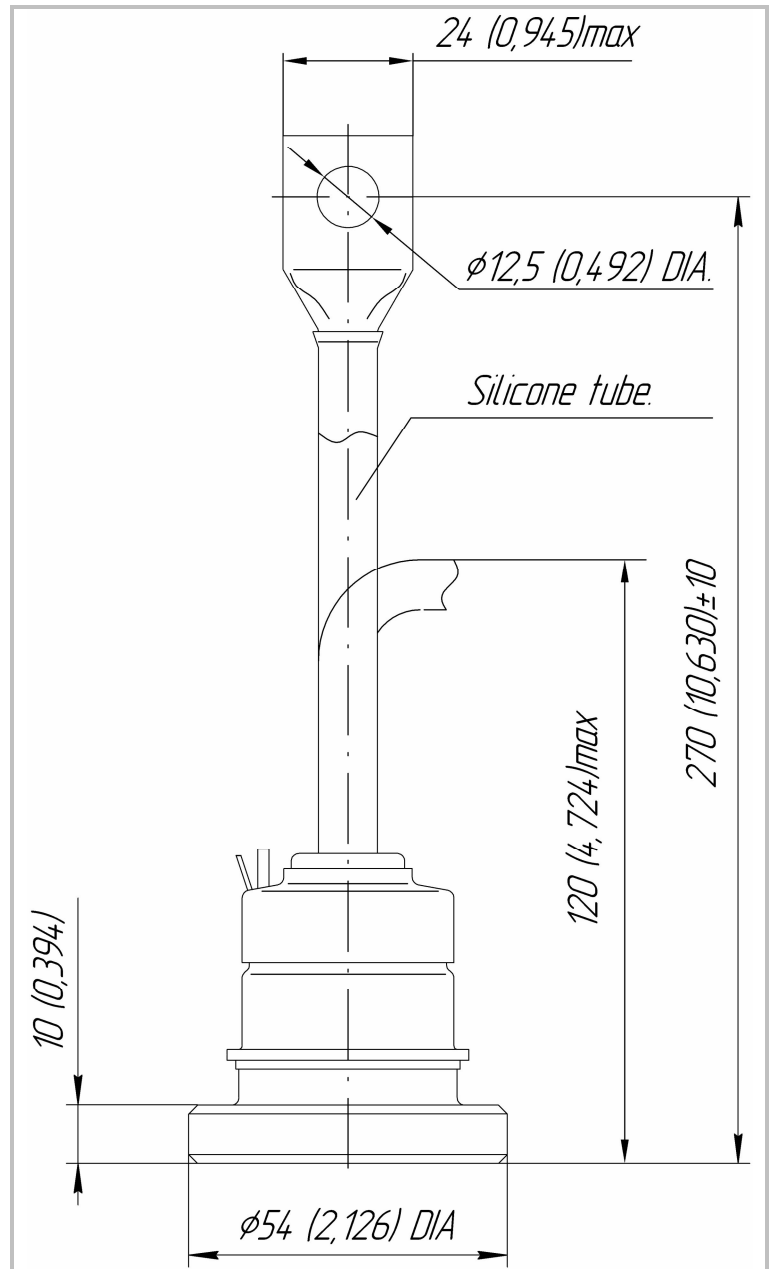

Polarity for the USA customs

Polarity		Example of code designation	Reference designation	Colors	
				Anode	Cathode
Normal	Cathode to stud	D790-SB3 <b>X</b> -18		Red tube	-
Reverse	Anode to stud	D790-SB3-18		-	Black tube

Polarity for Europe customs (on default)

Polarity		Example of code designation	Reference designation	Colors	
				Anode	Cathode
Normal	Anode to stud	D790-SB3-18		-	Red tube
Reverse	Cathode to stud	D790-SB3 <b>X</b> -18		Black tube	-

\*Please inform us about type of color marking (for the USA or Europe)